

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Box Patent Application  
Commissioner of Patents and Trademarks  
Washington, D.C. 20231

jc682 U.S. PTO  
09/519327  
03/06/00

PATENT FILING TRANSMITTAL

Transmitted herewith for filing is the Patent Application of: Upendra V. Chaudhari, Stephane H. Maes, and Jiri Navratil

For: VERBAL UTTERANCE REJECTION USING A LABELLER WITH GRAMATICAL CONSTRAINTS

TYPE OF FILING

This new patent application is for a(n):

- ☒ Utility  
☐ Design  
☐ Plant  
☐ Divisional  
☐ Continuation  
☐ Continuation-in-part

Benefit of a prior filed application

- ☐ This application claims the benefit of an earlier filed U.S. Patent Application under 35 USC 120.  
☐ Please accord Applicant the benefit of the priority date of \_\_\_\_\_ to this case pursuant to 35 USC 119. Applicant's claim for priority is based on application \_\_\_\_\_ filed in \_\_\_\_\_ on that date.

Filing under 37 CFR 1.53 (Utility) or 37 CFR 1.153 (Design)

- ☒ This is an application filed pursuant to 37 CFR 1.53 or 37 CFR 1.153, permitting receipt of a filing date upon filing of a specification, at least one claim and necessary drawings.  
☒ In the event any parts of this application are incomplete, please treat this as a filing under 37 CFR 1.53 or 37 CFR 1.153.

ENCLOSURES

- ☒ 23 - pages of written description;  
☒ 6 - pages of claims;  
☒ 1 - pages of abstract;  
☐ \_\_\_\_\_ - sheets of formal drawings;  
☒ 3 - sheets of informal drawings;  
☒ Declaration and Power of Attorney or listing of inventors;  
**and**  
☒ Two postcards for return to us as proof of receipt of the above documents.

plus

- ☒ An Assignment of the invention to IBM Corporation and an Assignment cover sheet;  
☐ Verified Statement Claiming Small Entity Status (37 CFR 1.9(f) and 1.27(b))  
☐ Form PTO-1449 (IDS) and two copies of the references listed thereon;

- ☐ A certified copy of \_\_\_\_\_(country) patent application number (priority document).  
☐ A preliminary amendment;  
☐ Declaration of Biological Deposit;  
☐ Submission of sequence listing, computer readable copy and/or amendment relating thereto for biotechnology invention containing nucleotide and/or amino acid sequence;  
☐ An associate power of attorney;  
☐ Other.

#### DECLARATION OR OATH

The enclosed Declaration or Oath has been executed by:

- ☒ Inventor(s);  
☐ Legal representative of the inventors (37 CFR 1.42 or 1.43);  
☐ Joint inventor or person showing proprietary interest on behalf of an inventor who refused to sign or who cannot be reached and this is a petition required by 37 CFR 1.47 and the statement required by 37 CFR 1.47 is attached;  
☐ Has not been executed and is enclosed for the purposes of identifying the inventors.

#### INVENTORSHIP STATEMENT

The inventorship for all the claims in this application is:

- ☐ the same;  
☐ not the same and, as an explanation, a statement is/ will be submitted.

#### LANGUAGE

The application submitted herewith is:

- ☒ in English;  
☐ in not in English and in terms of 37 CFR 1.52(d) a verified translation is  
☐ attached  
☐ not attached.

#### FEE CALCULATION


The filing fee has been calculated as shown below:

				SMALL ENTITY OR	OTHER THAN A
				SMALL ENTITY	SMALL ENTITY
BASIC FEE Design Patent				\$155	\$
BASIC FEE Utility Patent				\$345	\$
EXTRA FEES				RATE	FEE
TOTAL CLAIMS	23	MINUS 20=	3	x 9=	\$0
INDEP.CLAIMS	3	MINUS 3 =	0	x 39=	\$0
<input type="checkbox"/> MULTIPLE DEP.CLAIM				+135=	\$
<input checked="" type="checkbox"/> ASSIGNMENT				+ 40=	\$
<input type="checkbox"/> RULE 53 SURCHARGE				+ 65=	\$
TOTAL				\$	\$784

**FEE PAYMENT**

[X] Attached is Check No. 5513 in the sum of \$784.00 to cover the filing fee and, if applicable, the assignment fee.

Respectfully submitted,

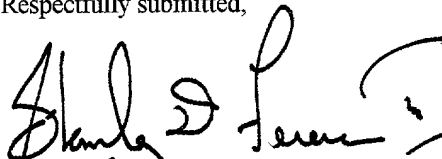

Dated: March 6, 2000

Stanley D. Ference III  
Reg. No. 33,879

FERENCE & ASSOCIATES  
129 Oakhurst Road  
Pittsburgh, Pennsylvania 15215  
(412) 781-7386  
(412) 781-8390-Facsimile

009000 254560

A

Docket No. YOR-2000-0006

PATENT

**IN THE UNITED STATES PATENT AND TRADEMARK OFFICE**

Applicant(s) : Upendra V. Chaudhari et al      Group Art: not yet assigned  
Serial No. : not yet assigned      Examiner: not yet assigned  
Filed : herewith  
For : VERBAL UTTERANCE REJECTION USING A LABELLER  
WITH GRAMMATICAL CONSTRAINTS

**EXPRESS MAIL CERTIFICATE**

Express Mail Label No. EL503717758US

Date of Deposit 6 March 2000


I hereby certify that the following attached paper(s) or fee:

Patent Application  
Written Description  
Claims 1-23  
Abstract  
Drawings (Figs. 1-4)  
Declaration and Power of Attorney  
Assignment with Cover Sheet  
Patent Filing Transmittal  
Certificate of Express Mail  
Two Return Postcards  
Check No. 5513 the amount of \$784.00

are being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service  
under 37 C.F.R. 1.10 on the date indicated above and is addressed to the Assistant Commissioner for  
Patents, Washington, D.C. 20231.

Stanley D. Ference III

(Typed or printed name of  
person mailing paper)

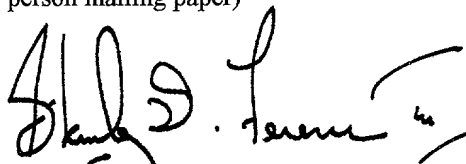

(Signature of person mailing  
paper(s) or fee)

Mailing Address:

FERENCE & ASSOCIATES  
129 Oakhurst Road  
Pittsburgh, Pennsylvania 15215  
(412) 781-7386  
(412) 781-8390-Facsimile

03/06/00  
jc784 U.S. PTO

09549327 030600

## **VERBAL UTTERANCE REJECTION USING A LABELLER WITH**

### **GRAMMATICAL CONSTRAINTS**

#### **Field of the Invention**

The present invention generally relates to methods and apparatus for verifying  
5 spoken passwords and sentences.

#### **Background of the Invention**

The concept of verbal utterance acceptance and rejection is increasingly prevalent  
in a wide variety of technologies and products that have been emerging in recent years.  
For instance, one technology gaining significantly in popular acceptance and use is  
10 automatic telephone dialing whereby, upon uttering a keyword or keyphrase such as  
“Mom”, “Office”, “Dr. Smith”, etc., an appropriate telephone number corresponding to  
the keyword/keyphrase will automatically be dialed, thus obviating the need for the user  
to have committed the number to memory or to have looked it up. A distinct advantage  
in comparison with keypad-type memory-based dialing systems, in which a commonly  
15 used number can be automatically dialed by pushing one or a few buttons on a telephone,  
is that such shortcuts do not have to be consciously looked up or committed to memory,  
either. Other applications of verbally prompted commands are of course prevalent and

contemplated, and their use is bound to increase with the development of additional technologies and products that are well-suited for such commands.

Conventional methods and apparatus for verifying spoken passwords and sentences employ “acoustic likelihoods” resulting from a decoding process. An acoustic  
5 likelihood is the probability that a spoken password or sentence actually matches a given target password or sentence.

Conventionally, acoustic likelihoods are typically normalized on an utterance basis, while predetermined thresholds are applied for purposes of verification (*i.e.*, should a verbal utterance meet a certain threshold in terms of the degree to which it matches a  
10 target word or phrase, based on given factors, it is construed as sufficiently matching the target word or phrase).

A verbal approach in the vein of the above is in U.S. Patent No. 5,717,826 (Lucent Technologies, Inc.). In this case, however, a full decoder is used to obtain the transcription of the keywords. The password modeling is done outside of the decoder in a  
15 second stage.

Similar arrangements are disclosed elsewhere which, in turn, tend not to solve problems and address issues in a manner that may be presently desired. U.S. Patent No.

5,465,317, entitled "Speech recognition system with improved rejection...", discloses a threshold-based technique based on acoustic likelihoods, as does U.S. Patent No. 5,613,037, entitled "Rejection of non-digit strings for connected digit speech recognition".

5 In view of the foregoing, a need has been recognized in conjunction with improving upon previous efforts in the field and surmounting their shortcomings discussed heretofore.

### **Summary of the Invention**

10 In accordance with at least one presently preferred embodiment of the present invention, a proposed method permits the verbal verification of a spoken password sentence (as opposed to the use of acoustic thresholds) to verify a spoken password sentence without computationally extensive large-vocabulary decoding. A decoder preferably uses target baseforms (representing the original content to be verified) together with a special set of competing simplified baseforms that may be easily constructed using  
15 finite-state grammars (FSG). Thus, in accordance with at least one embodiment of the present invention, a significant difference with respect to previous efforts is that the implicit password search within the decoder allows for a very low decoding complexity.

009999 2222 5555

In a simple configuration, the decoder may be carrying out a forced alignment on the password baseform with optional skip transitions added to the FSG graph (i.e. the competing baseforms are derived from the target baseform by replacing certain parts of it with null-arcs). If the spoken utterance, e.g. a digit string, does not correspond to the target baseform, the probability is high for the resulting hypothesis not to match the full baseform due to some of the skip transitions that were used by the decoder. The same is applicable for passwords enrolled as acoustic addwords as described in further detail herebelow.

For a better understanding of the present invention, together with other and further features and advantages thereof, reference is made to the following description, taken in conjunction with the accompanying drawings, and the scope of the invention will be pointed out in the appended claims.

### **Brief Description of the Drawings**

Fig. 1 shows a decoding graph with modified transition structure.

Fig. 2 shows a decoding graph for an addword-baseform with modified transition structure.



Fig. 3 illustrates, in schematic form, an overview of an utterance-verification system.

### **Detailed Description of the Preferred Embodiments**

In accordance with at least one preferred embodiment of the present invention, it  
5 is conceivable to employ an utterance verification system in at least two functional configurations of user enrollment, both of which are described herebelow and are illustrated schematically in Figures 1 and 2, respectively.

In the first configuration, relating to Figure 1, a password is selected by the user and the textual form of the password is communicated to the system, e.g. by choosing or  
10 specifying a digit string. Thus, the lexical transcription of the password is initially known. In this connection, Fig. 1 shows a decoding graph with a modified transition structure, using null-arcs for exemplary purposes.

The decoder preferably implements a Viterbi search with a word finite-state grammar (FSG), putting constraints on the search space within the trellis. (A Viterbi  
15 search is a search for an optimal path out of many through a trellis structure, given some well-defined likelihood measure. A description of a Viterbi search can be found in the context of a ballistic decoder as described in copending and commonly assigned U.S.

Patent Application Serial No. 09/015,150 as well as an article corresponding thereto, namely, "Acoustics Only Based Automatic Phonetic Baseform Generation", Ramabhadran et al., ICASSP'98, Seattle, 1998.) A password is preferably selected by a user during an enrollment stage, and the password forms the first part of the FSG.

5           The example of a four-digit password is shown in Fig. 1. Further, this part of the FSG will preferably only allow for transitions between the respective digits  $w_1 \dots w_T$  in the initially determined order ("forced alignment"). Optionally, the first part of the FSG may allow for silences and certain non-speech events (such as pauses, hesitations etc.) between the individual words.

10           The second part of the FSG accounts for competing decoding paths if an actual utterance does not comply with the correct password-utterance form. These units may be individual competitor words (*e.g.*, "pat" instead of "bat"), wordclasses, garbage models, or non-emitting ("null") arcs ( $\emptyset$ ) achieving skips to the next or any following unit specified in the first FSG-part. The null arcs ( $\emptyset$ ), in particular, are shown in Fig. 1.

15           With regard to competitor words, it should be noted that their choice depends upon the application in which the utterance rejection is being implemented and the setup at hand. For example, if there are two passwords for two users whose parts sound very similar, such as "pat" for a first user and "bat" for a second user, then "pat" could be a

competitor word for verifying the second user while “bat” could be a competitor word for verifying the first user. However, competitor words could even be very dissimilar words, with their choice depending upon the application at hand.

5 A “wordclass” may be considered as a group that covers both grammatical forms (e.g., “plate” vs. “plated”) as well as lexical groups. A digit wordclass, for instance, could include the digits “zero” through “nine”, but excluding the respective target digit of the target utterance.

“Garbage”, in the context expressed above, may be considered to be units that capture many different sounds whose origin may or may not be linguistically meaningful,  
10 such as mumble sounds, various background sounds, etc.

Fig. 2 shows a decoding graph for an addword-baseform with a modified transition structure. The decoder configuration involved is one in which the lexical structure of acoustic password is unknown. Accordingly, in the embodiment illustrated in Fig. 2, a password is selected by the user, but this time the user enrolls the password  
15 merely as an acoustic utterance, i.e. without specifying the corresponding text transcription to the system.



In a first environment, as described and illustrated with respect to Fig. 1, enrollment takes place essentially by textual communication such as, for example, typing in a word. A FSG is then generated. The FSG is preferably comprised of two parts. The first part preferably comprises the password selected by the user during enrollment in addition to minor variations on the password. Thus, this first part of the FSG may preferably be expanded beyond the “purely” enrolled password itself to variations of the password that have silences and non-speech events such as pauses and hesitations incorporated between individual words.

A second part of the FSG, on the other hand, will preferably account for competing decoding paths if a future utterance (that is to be compared to the enrolled password) does not comply with the enrolled password form. Thus, the second part of the FSG may preferably be comprised of known competitor words, wordclasses, garbage models or non-emitting ( $\emptyset$ ) arcs that embody skips to the next or a following unit specified in the first part of the FSG. In this connection, Fig. 1 is instructive in illustrating possible null-arc ( $\emptyset$ ) paths. As a non-restrictive example of a simple algorithm that may be used for generating the second part of an FSG, for instance, one could add a skip transition for every single word, then add a skip transition over every two adjacent words. This principle may be continued for three and more adjacent words

until the last skip transition added is one that “bridges” the complete word sequence as one large skip transition.

The embodiment of Fig. 2, however, relates to password enrollment that takes place acoustically, rather than textually. U.S. Patent Application Serial No. 09/015,150 describes, in detail, a method and arrangement for deriving a phonetically transcribed baseform on the basis of an acoustic enrollment. Thus, it is contemplated herein that the embodiment described and illustrated with respect to Fig. 2 will preferably employ a transcription arrangement such as that described in U.S. Serial No. 09/015,150 and Ramabhadran et al., *supra*, or a suitable substitute, for the purpose of deriving a phonetic transcription of an acoustic password enrollment, which is preferably stored for future use in being compared with future user utterances. Possible substitutes for the transcription arrangement described in U.S. Serial No. 09/015,150 and Ramabhadran et al., *supra*, are other common methods for phoneme recognition, such as vector quantising techniques or artificial neural networks.

Similarly to the embodiment described and illustrated with respect to Fig. 1, a FSG is preferably constrained to allow for transitions according to the “correct” password transcription as seen in the enrollment stage and as defined by a forced-alignment graph. The graph is preferably defined by a trellis space (*see* U.S. Serial No. 09/015,150).

However, the constraints are preferably expanded or “loosened” by adding competing units, unit classes or skips ( $\emptyset$ ), via OR- logic, to the forced-alignment portion of the FSG, so as to allow for decoding alternatives when an actual utterance differs from the correct password. Fig. 2 is particularly instructive in illustrating a decoding graph with a modified transition structure, in this case embodied by null-arcs ( $\emptyset$ ), where  $a_1..a_N$  represent the target baseform and each individual element  $a_1$ ,  $a_2$ , etc., represents an arc between “nodes” (represented by circles). If the transcription arrangement of U.S. Serial No. 09/015,150, or functional equivalent, is used, it will be appreciated that the aforementioned arcs could be subcomponents of single phone, wherein three such subcomponents may combine to constitute the phone. The “nodes” may essentially constitute “passages” of a password, or may simply be thought of as discrete time steps, in between which the aforementioned “arcs” extend. The solid circles, which each preferably initiate and terminate the arc sequence, respectively, in the graph illustrated in Fig. 2, may be construed, respectively, as representing a state of silence prior to and subsequent to the arc sequence.

The disclosure now turns to a discussion of an overall utterance verification system 100 formed in accordance with at least one presently preferred embodiment of the present invention and as illustrated in Fig. 3. It is to be understood that the embodiment

illustrated in Fig. 3 accounts for both of the enrollment sub-embodiments that were described and illustrated with respect to Figs. 1 and 2.

Fundamentally, in connection with the utterance verification arrangement 100 shown in Fig. 3, a transcription (102, 104, respectively) that results from a decoder configuration such as either of those described and illustrated with respect to Figs. 1 and 2, essentially undergoes a hypothesis test, and this will constitute the step of verification. Regardless of the transcription system used, the sequence in terms of the decoder's units (*i.e.*, the words in Fig. 1 or phonemes in Fig. 2, or possibly other units if a suitable alternative technique is used for automatic baseform generation [as mentioned heretofore] that might be based on, for example, subphonetic or syllabic units) is preferably matched to the "correct" or "ideal" realization of the password in question by using a dynamic pattern matching technique that accounts for certain insertions due to minor misrecognitions, silences and non-speech events in the actual utterance.

Preferably, if prompted text 102 is used, then the corresponding baseform as well as the first part of a FSG, as described heretofore in connection with Fig. 1, will be generated at step 106. Baseform generation, in this connection, essentially involves resolving the textual input into a phonetic transcription. The resulting FSG graph 108 will then preferably be modified at step 110, for instance, by adding null arcs. This may



be considered to be the step where the second part of a FSG is generated, as described heretofore in connection with Fig. 1.

If, instead of prompted text, an automatically derived baseform 104 is used, then step 106 may essentially be skipped. Thus, at step 110, there will be the modification  
5 necessary to generate a complete FSG from the baseform, as described heretofore in connection with Fig. 2.

Regardless of the alternative employed (i.e. that indicated at 102 or that indicated at 104), the result of step 110 is preferably the outputting of a complete FSG graph or trellis that will subsequently be used to resolve speech input 111 into a FSG-based forced  
10 alignment at step 112. In other words, prior to final verification (at step 114), a speech signal 111 (corresponding, *e.g.*, to someone's attempt at issuing a password and/or a verbal prompt for telephone dialing, etc.) will be resolved into a forced-alignment graph of purely phonetic units by removing non-phonetic units (*e.g.*, breaths, creaks, pauses, etc.) from the speech input 111, as accomplished by reconciling the raw speech input 111  
15 with the FSG graph that has been input from step 110. Thus, for example, inasmuch as the FSG graph input from step 110 will preferably account for a variety of non-speech units (or events) interspersed among purely phonetic units, the raw speech input 111 will preferably be "stripped" of such non-speech units before being output as decoded text

113. Preferably, the FSG graph input from step 110, as discussed heretofore, may also account for competitor words, wordclasses, garbage models, etc., to thus ensure forced alignment at step 112 of speech input 111 that may not even correspond precisely to the correct password.

5           It should be understood that, at step 112, if the speech signal 111 cannot, even in part, be accounted for by the FSG, then the decoder will preferably still undertake the act of picking one "best" path it can find given this FSG. The "best path" can be determined by essentially any suitable means, but will preferably be undertaken in such a way as to determine a path within the FSG that approximates the speech signal better than most, if  
10   not all, of the other possible paths within the FSG. Alternatively, a path may be randomly chosen by the FSG for this purpose, especially if the discrepancy between the speech signal 111 and the FSG is severe.

          In either eventuality, it will be appreciated that the FSG path associated with speech signal 111 will result in a low acoustic score (if indeed acoustic scoring is used;  
15   see below) and, more importantly, the decoded unit sequence will be highly unlikely to match the target unit sequence in step 114 (see below). The latter eventuality, that is, the mismatch of units, is considered to be more reliable, either with the concomitant use of acoustic scoring or without, than pure acoustic scoring.

It is to be understood that the decoding principles described above with relation to decoding step 112 may also be applied for cases of utterances which are not expected to necessarily contain only the target sentence but also some unknown verbal content preceding and/or following the target sentence, e.g. "The password is open sesame, I think" where "open sesame" might be the expected target part. (This "relaxed" variant of utterance rejection may be particularly relevant to support applications that allow natural language input, such as in U.S. Patent No. 5,897,616. ) In this case, the decoder at 112 works as a "keyword/sentence spotter" using the FSG generated in 110 and differs from the previously described mode only in that the starting and end points of the paths of the Viterbi trellis are determined dynamically and may not necessarily be identical to the starting and end points of the speech signal 111. There are well-known methods for keyword spotting in trellis-based decoders, e.g. as described in D.A. James, S.J. Young, "A Fast Lattice-Based Approach to Vocabulary Independent Wordspotting," Proc. of the International Conference on Acoustics, Speech, and Signal Processing 1994, Adelaide, Australia.

An algorithmic example of decoding the speech signal using the FSG 110 in the keyword-spotting case might appear as follows:

2. At each time frame  $v_t$  the decoder creates new paths in the trellis defined by the FSG (110) that start at this frame  $v_t$  and did not exist before, and, in addition, also maintains certain paths that were created (and start) at some of the previous time frames  $v_1, \dots, v_{(t-1)}$ .

4. At each time frame  $v_i$  the decoder also stores and terminates partial paths which reside in the end node of the FSG 110 and which attained some local score maximum in one of the previous frames and show a consistently decreasing score trend from that frame on.

5. The decoder stops in the last time frame and selects the best partial path from the set of paths stored during step 4. This path then corresponds to the decoded text 113.

By way of brief explanation, one may assume that the speech signal 111 does contain the target sentence (starting at  $v_{t1}$  and ending at  $v_{t2}$ ) which is preceded as well as followed by some unknown non-target speech. During decoding at 112, when the decoder has not yet come into the target region of the utterance ( $t < v_{t1}$ ), either most of the

5 paths will be discarded due to bad likelihoods (step 3.) because they do not match the modified FSG or they will be alive by matching certain parts of the FSG. In the latter case, however, the word sequence is highly unlikely to be the target sequence. Once the decoding gets into the target region ( $v_{t1} < t < v_{t2}$ ), paths with high scores will arise starting at or around  $v_{t1}$ , these paths will be in good correspondence with the target sentence.

10 Similarly, after the decoding passes the end of the target, the normalized scores of the paths alive will start decreasing and will subsequently stored and terminated (in step 4.). In the opposite case, when the speech signal 111 does not contain the target sentence at all, either no partial path will be stored (empty string 113) or its contents will be more or less random, in which case a rejection takes place at 114 (see below) with a high

15 probability.

Proceeding onward from decoding step 112, in any eventuality, decoded text 113 will preferably be compared at a matching step 114 with target content 150. Target content 150 is preferably the “pure” or “correct” phonetic transcription of the password in

question, regardless of whether it has originated from prompted text (102) or from an automatically derived baseform (104).

Matching at step 114 will preferably result in a score (155). The score (155) may be defined in essentially any of several ways. One way is to derive the score as a function  
5 directly proportional to the number of correct units and inversely proportional to the number of mismatched units, incorrectly inserted units and incorrectly deleted units. Furthermore, a special measure of the similarity of every two units may be defined and used for calculating the score. The score may alternatively be termed “confidence measure”. For actual matching, “dynamic pattern matching” or “dynamic time warping”  
10 process, generally well-known to those of ordinary skill in the art, can be employed.

The obtained score then serves as a basis for a verification decision at step 160. This can be done using an utterance-normalized threshold. It should be appreciated that, through the method of dynamic pattern matching (preferably performed at step 114), it is possible to derive a confidence measure or score (155) that is suitable for the purpose of  
15 threshold-based decisions, thus maintaining the possibility of having an adjustable operation point.

Alternatively, the dynamic pattern matching score (155) described above can be combined with the acoustic score of the trellis path that corresponds to the correct-

password transcription to render a verification decision at step 160. (A description of acoustic scoring may be found in U.S. Serial No. 09/015,150 and Ramabhadran et al., *supra*.) In accordance with a presently preferred embodiment of the present invention, the calculation of the acoustic likelihood of the correct-baseform path is included,

5 normalized by one or several competing paths or by an optimal null-grammar path or any of their combinations. Both the verbal-based score and the acoustic-based score are then preferably combined in either of the two following ways:

1. each score is first thresholded and the final decision is made according to the individual decisions, or
- 10 2. the scores are numerically combined before applying the threshold for final decision.

In carrying out the embodiments of the present invention, an suitable example of dynamic pattern matching (DPM) that may be employed can be found in L.R.Rabiner et al., "Considerations in Dynamic Time Warping Algorithms for Discrete Word  
15 Recognition" in IEEE Trans. On Acoustics, Speech, and Signal Processing, Vol. ASSP-26, No.6, December 1978.

A formulation of the scoring method might be exercised as follows:

Define a pairwise distance (or alternatively “likelihood” or “similarity”) measure between each of the defined decoder’s units  $a_1, \dots, a_w$  – let this distance be symmetric and denoted by  $D(a_i, a_j)$ . The value of  $D$  is calculated on every node of the DPM grid whose axes are determined by the decoded sequence of units and the original (target) sequence of units, between the corresponding two units at that node. This distance (or alternatively likelihood) is accumulated in a manner described in Rabiner et al., *supra*, and used for finding the best path through the DPM grid. The distance (or alternatively likelihood) of the final best path is then the resulting DPM “penalty” (or “score” for likelihoods) for the threshold-based utterance rejection.

As a non-restrictive example of a way of combining DPM and acoustic scores, one could utilize a linear combination of the scores, for example:

$$\text{Score\_final} = A * \text{Score\_DPM} + B * \text{Score\_Acoust} ,$$

where  $\text{Score\_final}$  is the final score,  $\text{Score\_DPM}$  is the score obtained from dynamic pattern matching,  $\text{Score\_Acoust}$  is the acoustic score and  $A$  and  $B$  are predetermined constants that respectively weight  $\text{Score\_DPM}$  and  $\text{Score\_Acoust}$  in a manner deemed appropriate for the application at hand.



In brief recapitulation, it will be appreciated from the foregoing that one underlying principle of utterance verification employed in connection with at least one embodiment of the present invention is to use acceptance/rejection rules based on the decoded sequence of labels or words, as opposed to using only acoustic-likelihood-based confidence measures with thresholds. Another associated principle that is preferably employed is to apply constraints within the decoder so as to allow for accurate transcription if an utterance complies with the correct password but also for erroneous transcriptions of incorrect utterances by applying competing grammar parts.

From the foregoing, it will be appreciated that a significant advantage associated with methods and apparatus according to the present invention is a very low decoding complexity (low additional computation to the forced alignment) while maintaining comparable performance of full-decoder-based systems.

As discussed heretofore, practical uses of the methods and apparatus according to at least one embodiment of the present invention are virtually limitless but may include, for example, name-based telephony applications (*e.g.*, when a telephone number can be dialed merely by uttering a name associated with the telephone number). Another foreseen practical use is voice identification, *e.g.* in a computer system for permitting a user to access sensitive files. In any application, utterance rejection may be employed to

prompt the user to repeat an utterance if the user's initial verbal utterance is rejected as not sufficiently matching a known password.

It is to be understood that the term "password", as employed herein, may be taken to be indicative of not only a password that is comprised of one word, but a password sentence that is comprised of more than one word. It is to be understood that the terms "password" and "password sentence" may thus be considered to be interchangeable.

It is to be understood that the present invention, in accordance with at least one presently preferred embodiment, includes a target password generator for generating at least one target password and an acceptance arrangement for comparing text based on a verbal utterance to at least one target password and for accepting or rejecting the verbal utterance based on its comparison to the at least one target password sentence. Together, the target password sentence generator and acceptance arrangement may be implemented on at least one general-purpose computer running suitable software programs. These may also be implemented on at least one Integrated Circuit or part of at least one Integrated Circuit. Thus, it is to be understood that the invention may be implemented in hardware, software, or a combination of both.

If not otherwise stated herein , it is to be assumed that all patents, patent applications, patent publications and other publications mentioned and cited herein are hereby fully incorporated by reference herein as if set forth in their entirety herein.

Although illustrative embodiments of the present invention have been described  
5 herein with reference to the accompanying drawings, it is to be understood that the invention is not limited to those precise embodiments, and that various other changes and modifications may be affected therein by one skilled in the art without departing from the scope or spirit of the invention.

## Claims

What is claimed is:

1. An apparatus for verifying verbal utterances, said apparatus comprising:

a target password sentence generator which generates at least one target password

5 sentence; and

an acceptance arrangement which compares text based on a verbal utterance to at least one target password sentence and which accepts or rejects the verbal utterance based on its comparison to the at least one target password sentence.

2. The apparatus according to Claim 1, further comprising a decoder which  
10 transforms a verbal utterance into decoded text for being compared to the at least one target password sentence in said acceptance arrangement.

3. The apparatus according to Claim 2, further comprising:

a finite state grammar generator which generates a finite state grammar to be employed by said decoder;

said decoder being adapted to transform a verbal utterance into decoded text via employing the finite state grammar to modify the verbal utterance.

4. The apparatus according to Claim 3, wherein said decoder is adapted to transform a verbal utterance into decoded text via employing the finite state grammar to undertake a forced alignment of the verbal utterance.

5. The apparatus according to Claim 3, wherein said finite state grammar generator includes a first generator for generating a first part of a finite state grammar and a second generator for generating a second part of a finite state grammar.

6. The apparatus according to Claim 5, wherein:  
said first generator is adapted to generate a first part of a finite state grammar that includes at least a target password sentence; and

said second generator is adapted to generate a second part of a finite state grammar that includes competing decoding paths of the target password sentence.

7. The apparatus according to Claim 1, wherein said target password sentence generator is adapted to accept prompted text corresponding to at least one password.

8. The apparatus according to Claim 1, wherein said target password sentence generator is adapted to automatically generate at least one password as a baseform that is derived from an acoustic enrollment.

9. The apparatus according to Claim 1, wherein said acceptance arrangement is adapted to derive a match score based on comparing text based on a verbal utterance to the at least one target password sentence and to base acceptance or rejection of the verbal utterance on the match score.

10. The apparatus according to Claim 9, wherein said acceptance arrangement is adapted to derive a match score via dynamic pattern matching.

11. The apparatus according to Claim 9, wherein said acceptance arrangement is adapted to derive a match score via a combination of dynamic pattern matching and acoustic scoring.

12. A method of verifying verbal utterances, said method comprising:

generating at least one target password sentence;

comparing text based on a verbal utterance to at least one target password sentence; and

accepting or rejecting the verbal utterance based on its comparison to the at least one target password sentence.

13. The method according to Claim 12, further comprising:

transforming the verbal utterance into decoded text;

5       said comparing step comprising comparing the decoded text to the at least one target password sentence.

14. The method according to Claim 13, further comprising:

generating a finite state grammar;

10       said transforming step comprising transforming the verbal utterance into decoded text via employing the finite state grammar to modify the verbal utterance.

15. The method according to Claim 14, wherein said step of transforming the verbal utterance into decoded text comprises employing the finite state grammar to undertake a forced alignment of the verbal utterance.

16. The method according to Claim 14, wherein said step of generating a finite state grammar comprises generating a first part of the finite state grammar and a second part of the finite state grammar.

17. The method according to Claim 16, wherein:

said step of generating the first part of the finite state grammar comprises the inclusion of the at least one target password sentence; and

said step of generating the second part of the finite state grammar comprises the inclusion of competing decoding paths of the at least one target password sentence.

18. The method according to Claim 12, wherein said step of generating at least one target password sentence comprises accepting prompted text.

19. The method according to Claim 12, wherein said step of generating at least one target password sentence comprises automatically generating a baseform derived from an acoustic enrollment.

20. The method according to Claim 12, wherein said step of accepting or rejecting comprises deriving a match score based on comparing text based on the verbal utterance to the at least one target password sentence and to base acceptance or rejection of the verbal utterance on the match score.

21. The method according to Claim 20, wherein said step of deriving a match score comprises deriving a match score via dynamic pattern matching.



22. The method according to Claim 20, wherein said step of deriving a match score comprises deriving a match score via a combination of dynamic pattern matching and acoustic scoring.

23. A program storage device readable by machine, tangibly embodying a  
5 program of instructions executable by the machine to perform method steps for verifying verbal utterances, said method comprising:

generating at least one target password sentence;

comparing text based on a verbal utterance to at least one target password sentence; and


10 accepting or rejecting the verbal utterance based on its comparison to the at least one target password sentence.

## **VERBAL UTTERANCE REJECTION USING A LABELLER WITH**

### **GRAMMATICAL CONSTRAINTS**

#### **Abstract of the Disclosure**

Methods and apparatus for verifying spoken passwords and sentences with small  
5 decoder complexity requirements. A proposed method permits the verbal verification of  
a spoken password sentence without computationally extensive large-vocabulary  
decoding. A decoder preferably uses target baseforms (representing the original content  
to be verified) together with a special set of competing simplified baseforms that may be  
easily constructed using finite-state grammars (FSG).

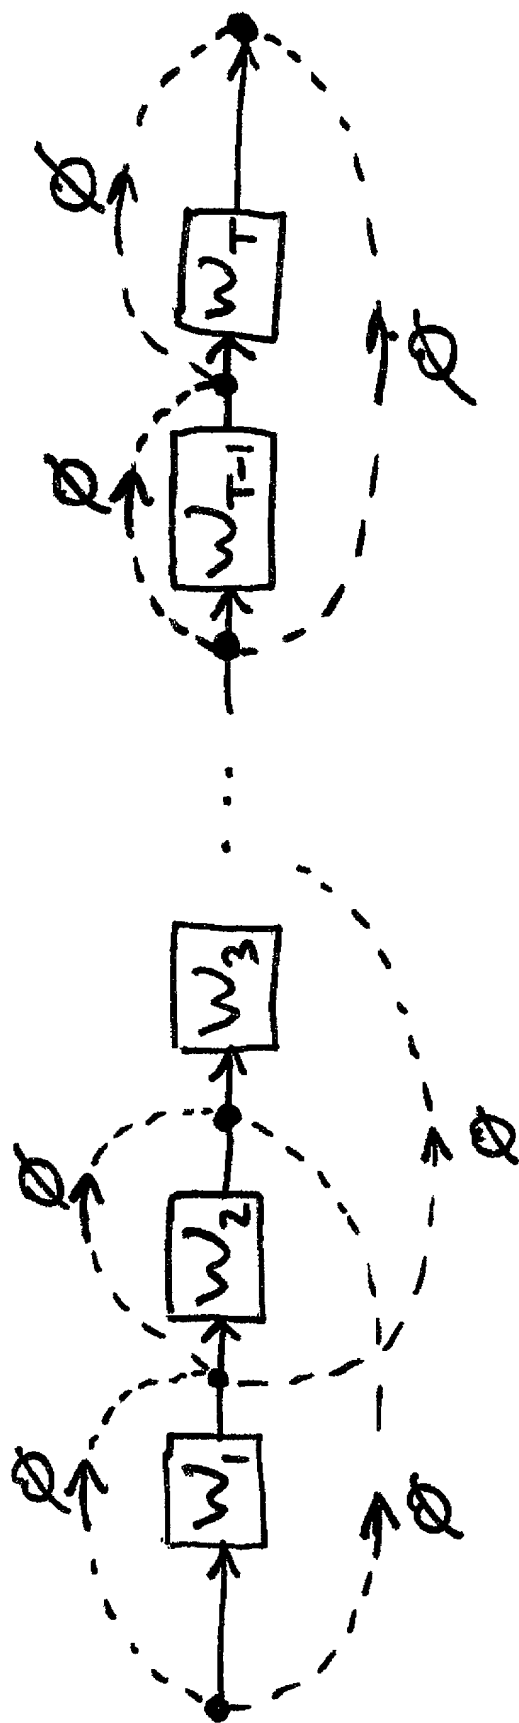

( $w_1 \dots w_t$  - target verbal content)  
Fig. 1

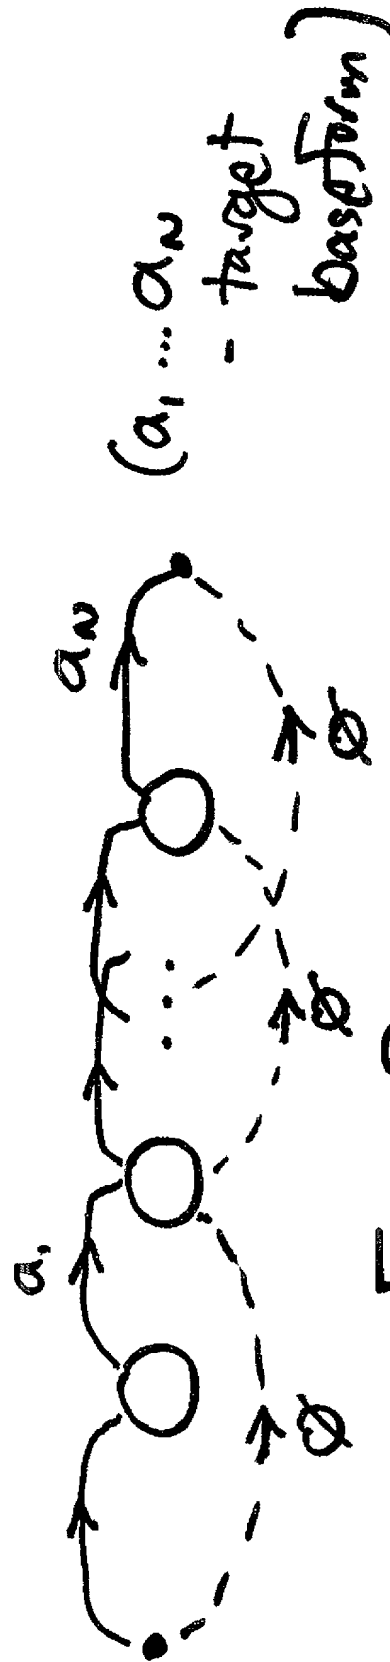


Fig. 2

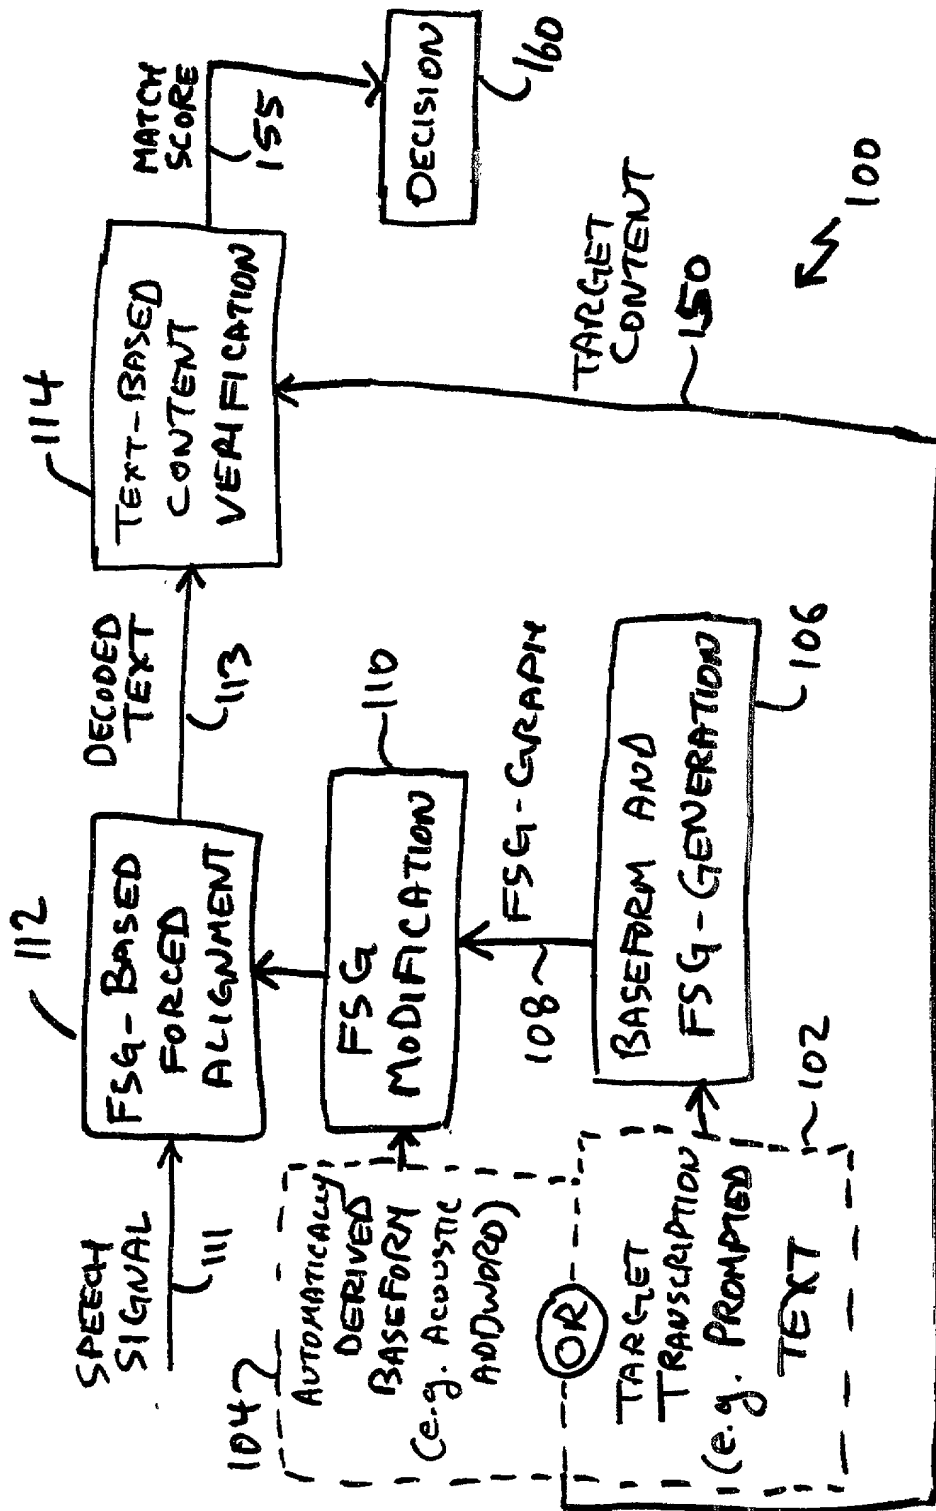


FIG. 3

# DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name;

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

## VERBAL UTTERANCE REJECTION USING A LABELLER WITH GRAMMATICAL CONSTRAINTS

the specification of which (check one)

☒ is attached hereto.

\_\_\_\_\_ was filed on \_\_\_\_\_ as International Business Machines Docket No. YOR9-2000-0006

\_\_\_\_\_ ket PCT International Application Number

and was amended on \_\_\_\_\_ (if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the patentability of this application in accordance with Title 37, Code of Federal Regulations, Section 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, §119(a)-(d) or §365(b) of any foreign application(s) for patent or inventor's certificate, or §365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application, having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)

Priority Claimed

_____ (Number)	_____ (Country)	_____ (Day/Month/Year Filed)	_____ Yes	_____ No
_____ (Number)	_____ (Country)	_____ (Day/Month/Year Filed)	_____ Yes	_____ No
_____ (Number)	_____ (Country)	_____ (Day/Month/Year Filed)	_____ Yes	_____ No

I hereby claim the benefit under 35 U.S.C. §119(e) of any United States provisional application(s) listed below.

\_\_\_\_\_ (Application Number)      \_\_\_\_\_ (Filing Date)

\_\_\_\_\_ (Application Number)      \_\_\_\_\_ (Filing Date)

**DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION**

I hereby claim the benefit under 35 U.S.C. §120 of any United States Application(s), or §365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States, or PCT International application in the manner provided by the first paragraph of 35 U.S.C. §112, I acknowledge the duty to disclose information material to the patentability of this application as defined in 37 CFR §1.56 which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

\_\_\_\_\_  
(Application Serial No.)                      (Filing Date)                      (Status) (patented, pending, abandoned)

\_\_\_\_\_  
(Application Serial No.)                      (Filing Date)                      (Status) (patented, pending, abandoned)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that willful false statements may jeopardize the validity of the application or any patent issued thereon.

**POWER OF ATTORNEY:** As a named inventor I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith (list name and registration number).

Manny W. Schecter (Reg. 31,722), Terry J. Ilardi (Reg. 29,936), Christopher A. Hughes (Reg. 26,914), Edward A. Pennington (Reg. 32,588), John E. Hoel (Reg. 26,279), Joseph C. Redmond, Jr. (Reg. 18,753), Paul J. Otterstedt (Reg. 37,411), Douglas W. Cameron (Reg. 31,596), Wayne L. Ellenbogen (Reg. No. 43,602), Stephen C. Kaufman (Reg. 29,551), Daniel P. Morris (Reg. 32,053), Louis J. Percello (Reg. 33,206), Jay P. Sbrollini (Reg. 36,266), Robert M. Trepp (Reg. 25,933), David M. Shofi (Reg. 39,835, and Louis P. Herzberg (Reg. 41,500)

Send Correspondence to: FERENCE & ASSOCIATES, 129 Oakhurst Road, Pittsburgh, PA 15215

Direct Telephone Calls to: (name and telephone number) Stanley D. Ference III, (412) 781-7386

Upendra V. Chaudhari

Full name of sole or first inventor

Upendra V. Chaudhari  
Inventor's Signature

March 3, 2000  
Date

202 Nob Hill Drive, Elmsford, NY 10523  
Residence

USA

Citizenship

Same as above

Post Office Address

**DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION**

**Stephane H. Maes**

Full name of second joint-inventor, if any



Inventor's Signature

Date

3/3/00

1 Wintergreen Hill Road, Danbury, CT 06811

Residence

Belgium


Citizenship

Same as above

Post Office Address

**Jiri Navratil**

Full name of third joint-inventor, if any



Inventor's Signature

Date

03/03/00

154A North Broadway, 2D, White Plains, NY 10603

Residence

Czech Republic

Citizenship

Same as above

Post Office Address